


NOGIX

ایرژی

www.inergy.ir

Pneumatic Actuator NOG BT Series

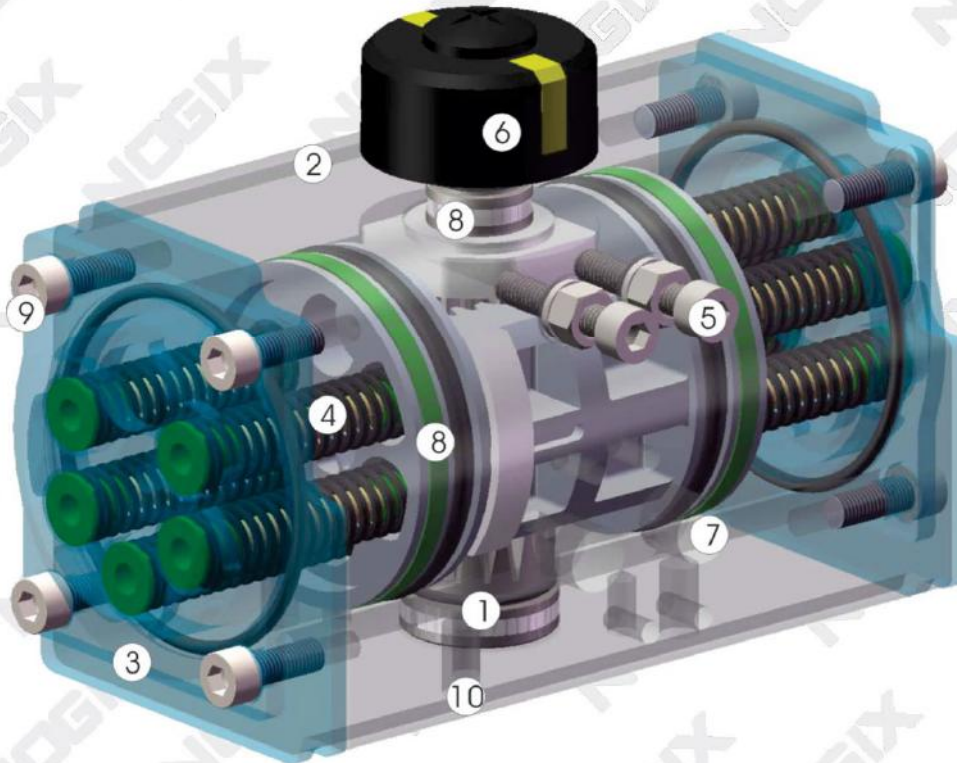

NOG BTD / NOG BTS series of new valve pneumatic actuator


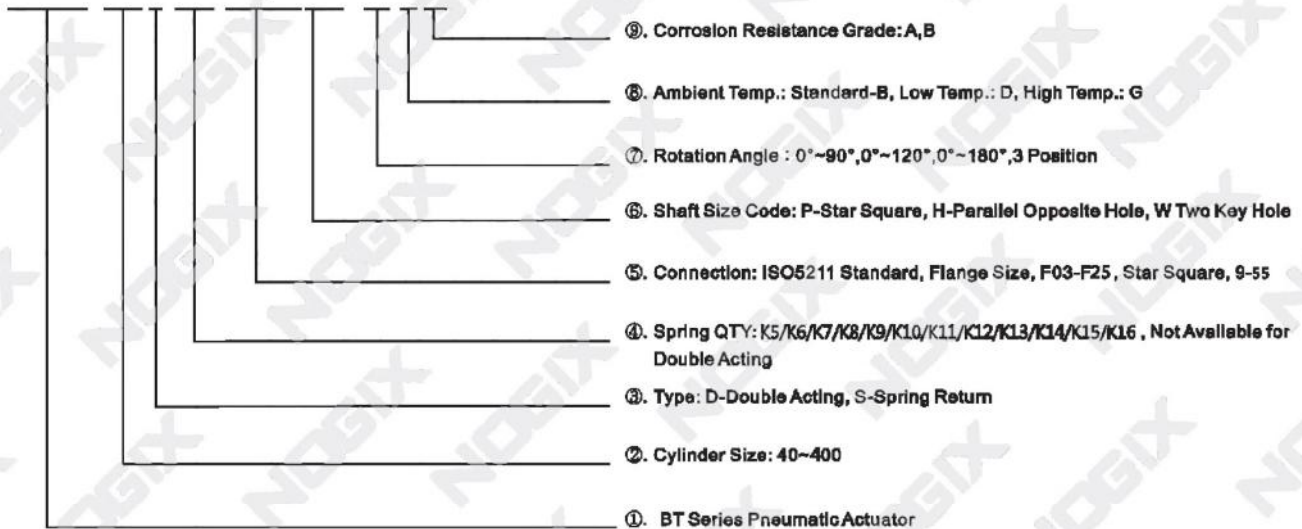
NOGBTD/NOGBTS new rack and pinion pneumatic actuator by the NOGIX company combines the latest technology at home and abroad, through the three-dimensional model of innovation and optimization of CAD design, beautiful shape compact, modern styling; and adopt practical new materials, new processes, so that the product quality, more reliable; more standard selection of more affordable; products fully meet the latest international standards, technical specifications, to meet current and future needs.

- ① dual piston rack and pinion design of symmetric structures, rapid and smooth movement, high precision, high output power by a simple change in the direction of the piston assembly positions available anti-rotation.
- ② high quality extruded aluminum alloy cylinder block, by precision machining the hole and the external surface of hard anodized (anodic oxidation under special circumstances + Teflon coating), longer life, low friction coefficient.
- ③ integrated design, all the double acting and single-function actuator models have the same cylinder and end caps, easily removed by installing a spring or spring to change the mode of action.


- ④ combined pre-spring break Hean whole group, whether in the assembly process or use on-site in both convenient and safe to install or change the
- ⑤ the external side of the two single independent adjustment screw has been number of springs, installed in the valve for the actuator is precisely to facilitate, control valve open and valve closed position, For the whole trip conditioned office is also configured in two cover a longer adjustment screws.
- ⑥ multi-position indicator, on-site visual instructions, consistent with VDI/VDE3845, NAMUR standard slot, the output can be installed and all the accessories, such as limit switch box, electric positioner, position sensor (Pepperl and Fuchs, Turck).
- ⑦ gas source interface line NAMUR standard, direct safety plaques NAMUR standard solenoid valve.
- ⑧ rack on the back of the composite bearing and piston guide ring and the output shaft bearings to prevent metal on metal friction and increasing lubrication, so a low friction, long life.
- ⑨ All fasteners are stainless steel, long-term corrosion resistance.
- ⑩ connection part of the line with new international standard ISO5211, DIN3337 (F03-F25) makes products with interchangeable, versatile.

Model preparation

NOGBT-160 S-K10 F10/12 P27-90-B-A




Components and materials, corrosion

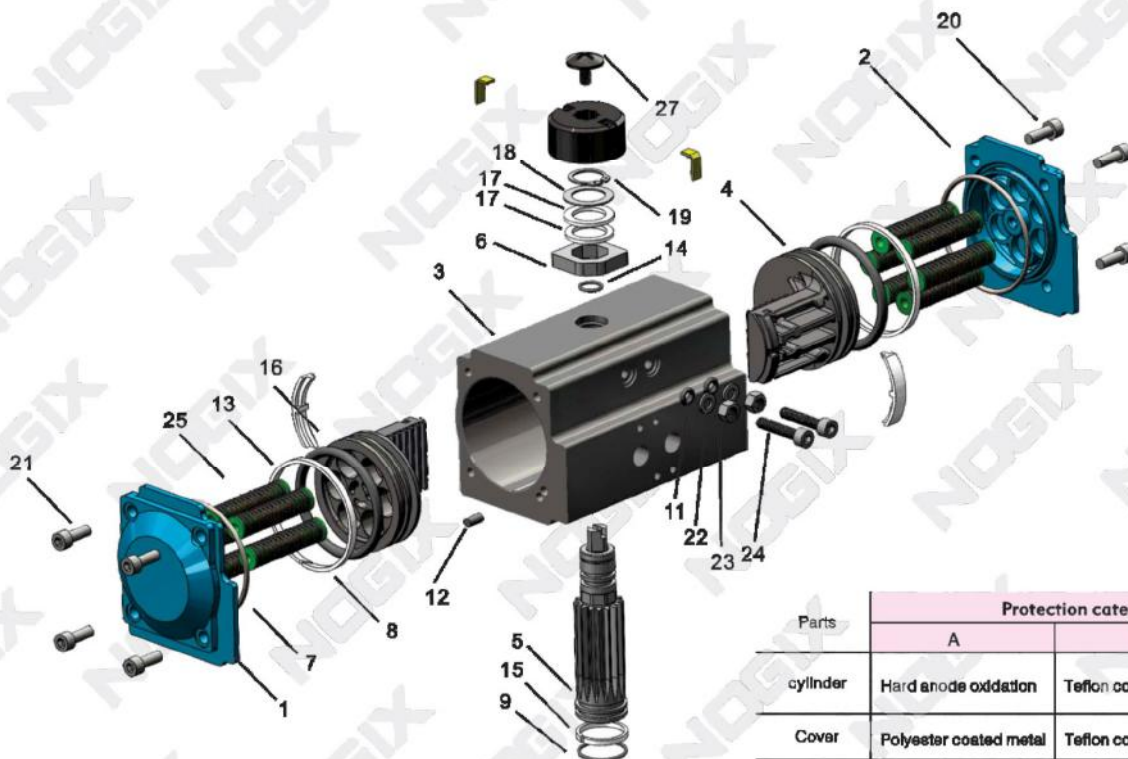


Parts	Protection category	
	A	B
Cylinder	Hard anode oxidation	Teflon coating+ Anode electroless
Cover	Polyester coated metal	Teflon coating
Output shaft	Carbon steel electroless nickel plating	Electroless nickel plating or stainless steel
Use Occasion	General situation	General occasions or low concentrations of acidic environment

Part Number	Each number	Part Name	Standard Materials	Selected materials
01	1	Left Cover	Aluminum Die Casting	Stainless steel
02	1	Right Cover	Aluminum Die Casting	Stainless steel
03	1	body	Aluminum die casting	Stainless steel
04	2	Piston	Aluminum Die Casting	-----
05	1	Output shaft	Carbon Steel	Stainless steel
06	1	Cam adjustment	Stainless steel	-----
07 *	2	O-ring (cover)	NBR	Fluorine or silicone rubber
08 *	2	O-ring (Piston)	NBR	Fluorine or silicone rubber
09 *	1	O-ring (output shaft bottom)	NBR	Fluorine or silicone rubber
10 *	1	O-ring (output shaft at the top)	NBR	Fluorine or silicone rubber
11 *	2	O-ring (adjusting screw)	NBR	Fluorine or silicone rubber
12 *	2	Plug (Cylinder)	NBR	Fluorine or silicone rubber
13 *	2	Bearing (Piston)	POM	-----
14 *	1	Bearing (output shaft at the top)	POM	-----
15 *	1	Bearing (output shaft bottom)	POM	-----
16 *	1	Guide with Bearing (Piston back)	POM	-----
17 *	2	Thrust bearings (output shaft)	POM	-----
18	2	Gasket (output shaft)	Stainless steel	-----
19	1	Flexible file ring	Spring steel	-----
20	4	Cover bolt	Stainless steel	-----
21	4	Cover Gasket	Stainless steel	-----
22	2	Gasket	Stainless steel	-----
23	2	Nut	Stainless steel	-----
24	2	Adjustment bolt	Stainless steel	-----
25	5-12	Spring Components	Alloy spring steel	-----
26	1	Position indicator	POM	-----
27	1	Screw of indicator	POM	-----


Torque Diagram



double acting



single acting



Double Acting Operation


Selection of double action actuators



The suggested safety factor for double acting actuators under normal working conditions is 20%-30%

Example:

- The torque needed by valve= 100 N.m
- The torque considered safety factor $100 \times (1+30\%) = 130 \text{ N.m}$
- Air Supply=6 Bar

According to double acting torque table, we can choose the minimum model is BF-105D.

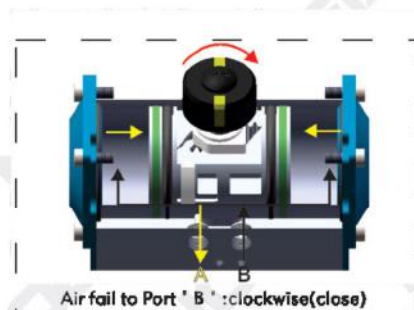

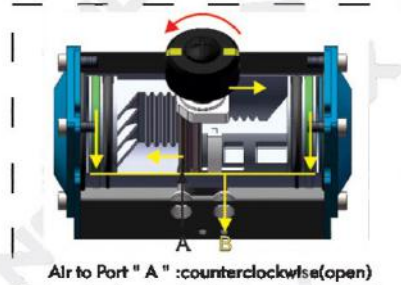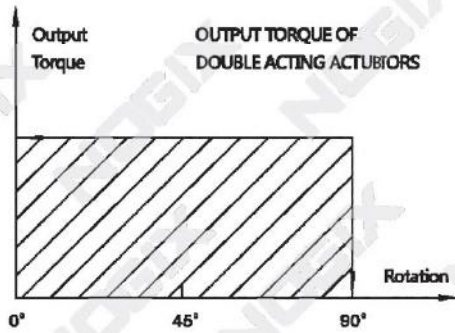

* Pistons must be inverted to reverse actuator rotation

Spring Return Operation

Selection of single action actuators

Under normal operating conditions, a single actuator to consider the role of the safety factor of 30% -50%.

For example:

Valve required torque = 100N.m

Safety torque = $100 \times (1 + 30\%) = 130 \text{ N.m}$

according to single acting actuator output torque table, we can find BT-140SK10

Torque following

Implementation process 0° = 216.8 N.m air

Implementation process 90° = 175.8 N.m air



Spring stroke 0° = 172 N.m

Spring stroke 90° = 258 N.m

output Torque bigger than all our needs

Note:

Single action during the spring return actuators, actuator B hole ventilation does not affect actuator output torque, instead it's helpful of spring return

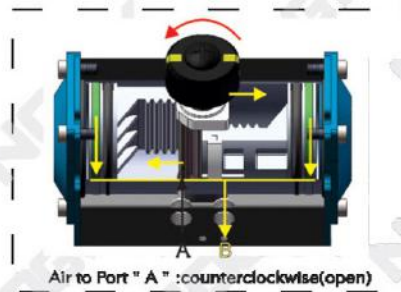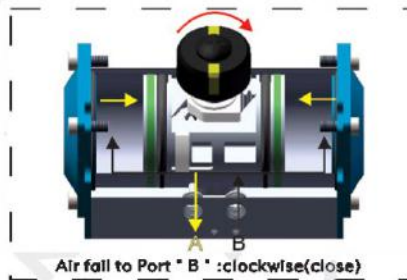


* Spring force makes the actuator clockwise when the air is exhausted at port " A "

* When air fall to counterclockwise is required, the pistons must be inverted

Double Acting Actuator Output Torque(Nm)

Model	Air supply pressure(Unit:Bar)								
	3bar	3.5bar	4bar	4.5bar	5bar	5.5bar	6bar	7bar	8bar
NOG BT-40D	5.7	8.7	7.6	8.6	9.6	10.5	11.4	13.3	15.2
NOG BT-52D	12.0	14.0	16.0	18.0	20.0	22.0	24.0	28.0	32.0
NOG BT-63D	21.0	24.5	28.0	31.5	35.0	38.5	42.0	49.0	56.0
NOG BT-75D	30.0	35.0	40.0	45.0	50.0	55.0	60.0	70.0	80.0
NOG BT-83D	45.7	53.3	61.0	68.6	76.2	83.8	91.4	106.7	121.9
NOG BT-92D	67.4	78.7	89.9	101.2	112.4	123.6	134.9	157.4	179.8
NOG BT-105D	97.6	119.9	139.2	146.4	162.7	179.0	195.2	227.8	260.3
NOG BT-125D	152.2	177.6	203.0	228.3	253.7	279.1	304.4	355.2	405.9
NOG BT-140D	260.3	303.7	347.0	390.4	433.8	477.2	520.6	607.3	694.1
NOG BT-160D	396.6	462.7	528.8	594.9	661.0	727.1	793.2	925.4	1057.6
NOG BT-190D	639.3	745.9	852.4	959.0	1065.6	1172.1	1278.6	1491.7	1704.8
NOG BT-210D	781.0	911.2	1041.4	1171.5	1301.7	1431.9	1562.0	1822.4	2082.7
NOG BT-240D	1147.6	1338.8	1530.1	1721.3	1912.6	2103.9	2295.1	2677.6	3060.2
NOG BT-270D	1742.9	2033.4	2323.8	2614.3	2904.8	3195.3	3485.8	4066.7	4647.7
NOG BT-300D	2390.8	2789.3	3187.8	3586.2	3984.7	4383.2	4781.6	5576.6	6375.5
NOG BT-350D	3580	4176	4773	5369	5965	6561	7157	8352	9546
NOG BT-400D	5100	5950	6800	7650	8500	9350	10200	11900	13600

Dimensional Drawing

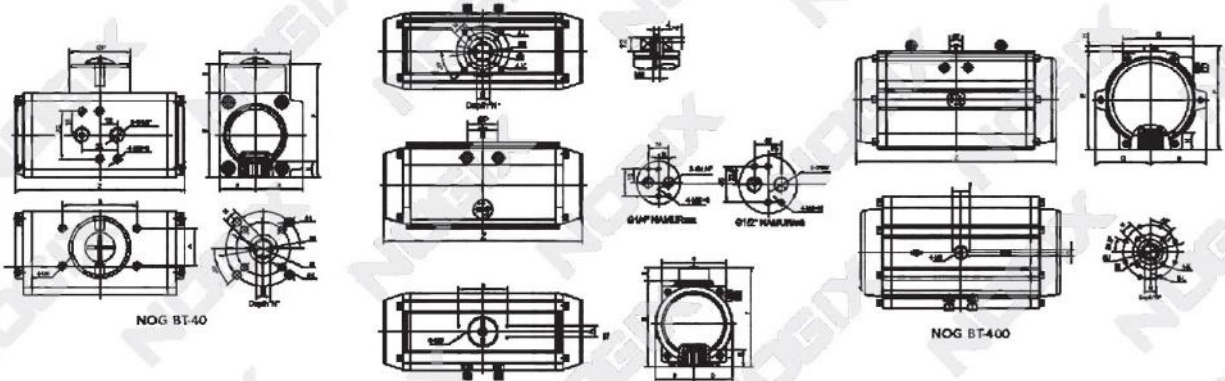

Dimension

NOG BT-52, NOG BT-63, NOG B-75, NOG BT-83, NOG BT-92, NOG BT-105, NOG BT-125
NOG BT-140, NOG BT-160, NOG BT-190, NOG BT-210, NOG BT-240, NOG BT-270, NOG BT-300, NOG BT-350

Unit (mm)

Model	A	B	C	D	E	F	G	H	I	I-1	J	J-1	K	L	M	N	P	Z	Air
NOG BT-40	25	50	24	32	56	76	48	20	36	F03	50	F05	M5×8	M6×10	9	10	42	110	1/8"
NOG BT-52	30	80	30	42.5	72.4	92.4	50.5	20	36	F03	50	F05	M5×8	M6×10	11	14	42	150	1/4"
NOG BT-63	30	80	36	47	88.5	108.5	69.5	20	50	F05	70	F07	M8×10	M8×13	14	18	42	171	1/4"
NOG BT-75	30	80	42.5	53	100	120	78	20	50	F05	70	F07	M8×10	M8×13	14	18	42	186	1/4"
NOG BT-83	30	80	46.5	57	109.5	129.5	86	20	50	F05	70	F07	M6×10	M8×13	17	21	42	206	1/4"
NOG BT-92	30	80	50	58	117	137	90	20	50	F05	70	F07	M6×10	M8×13	17	21	42	265	1/4"
NOG BT-105	30	80	57.5	64	135	155	104.5	20	70	F07	102	F10	M8×13	M10×16	22	26	42	272	1/4"
NOG BT-125	30	80	67.5	74.5	157	187	120.5	30	70	F07	102	F10	M8×13	M10×16	22	26	62	304	1/4"
NOG BT-140	30	80	75.5	75.5	174	204	125	30	102	F10	125	F12	M10×16	M12×20	27	32	62	395	1/4"
NOG BT-160	30	130	87	87	198	228	143	30	102	F10	125	F12	M10×16	M12×20	27	32	80	462	1/4"
NOG BT-190	30	130	103	103	232	262	172	30	/	/	140	F14	/	M16×25	36	40	80	552	1/4"
NOG BT-210	30	130	113	113	257	287	194	30	/	/	140	F14	/	M16×25	36	40	90	556	1/4"
NOG BT-240	30	130	130	130	292	322	230	30	/	/	165	F16	/	M20×30	46	50	90	630	1/4"
NOG BT-270	30	130	147	147	331	361	252	30	/	/	165	F16	/	M20×30	46	50	90	750	1/2"
NOG BT-300	30	130	161	172	354	384	290	30	/	/	165	F16	/	M20×30	46	50	90	772	1/2"
NOG BT-350	30	130	190	190	410	440	334	30	165	F16	254	F25	M20×30	8-M16×25	46	50	90	860	1/2"
NOG BT-400	30	130	262	262	466	496	330	30	165	F16	254	F25	M20×30	8-M16×25	55	72	90	938	1/2"




Single Acting Actuator Output Torque(Nm)

Model	Air pressure		Spring Torque																		Spring Torque			
	Spring Q.ty	2.5bar		3.0bar		3.5bar		4.0bar		4.5bar		5.0bar		5.5bar		6.0bar		7.0bar		8.0bar		0° Start	90° End	
		0° Start	90° End	0° Start	90° End	0° Start	90° End	0° Start	90° End	0° Start	90° End	0° Start	90° End	0° Start	90° End	0° Start	90° End	0° Start	90° End					
NOG BT-62S	6	6.7	3.5	7.7	5.8	9.7	7.8	11.7	9.8	13.7	11.8	15.7	13.8	17	14.6	18.1	15.4	21.3	18.1	24.4	20.9	6.2	4.3	
	7	5	2.8	7	4.4	9	6.8	11	8.6	13	10.6	16	12.6	14.1	11.4	16.1	13.4	18.1	15.1	21.3	18.1	7.4	5	
	8			8.1	5.4	10.1	7.4	12.1	9.4	14.1	11.4	16.1	13.4	18.1	15.4	21.3	18.1	24.4	20.9	27.9	24.4	8.6	5.9	
	9			7.3	4.1	9.3	6.1	11.3	8.4	13.3	10.1	15.3	12.1	17.3	14.1	19.3	16.1	21.3	18.1	24.4	20.9	9.9	6.7	
	10					8.4	4.9	10.4	7.5	12.4	9.5	14.4	11.9	16.4	13.9	18.9	16.4	21.4	18.9	24.4	20.9	11.1	7.6	
	11																					12.4	8.5	
	12																					13.6	9.3	
	NOG BT-68S	6	10.7	7.1	14.2	10.6	17.7	14.1	21.2	17.6	24.7	21.1	28.2	24.6	31.3	27.7	34.8	31.2	38.3	34.7	41.4	37.8	10.4	6.8
		7	9.3	5	12.8	8.5	16.3	12	19.8	15.5	23.3	19	26.3	22.5	30.3	26	33.3	29.5	36.3	32.5	39.3	35.5	12.5	8.2
		8			11.4	6.4	14.9	9.9	18.4	13.4	21.9	16.9	25.4	20.4	28.9	23.9	32.4	27.9	35.9	31.9	38.9	34.9	14.6	9.6
		9					18.6	7.8	21.1	15.3	24.6	18.3	27.6	21.8	31.1	24.8	33.1	27.3	34.8	31.2	38.3	34.7	16.7	10.9
		10							16.7	9.2	19.2	12.7	22.7	16.2	26.2	19.7	29.7	23.2	31.2	27.6	34.7	31.1	18.8	12.3
11										17.8	10.6	21.3	14.1	24.8	17.8	28.3	21.8	31.2	27.6	34.7	31.1	20.9	13.7	
12											20	12.1	23.6	15.6	27	15.6	34	26.1	33.1	29.5	35.5	22.9	15	
NOG BT-76S		6	14.5	10.6	19.5	15.6	24.5	20.6	29.5	25.6	34.5	30.6	39.5	35.6	44.5	40.6	49.5	45.6	54.5	50.6	59.5	55.6	14.5	10.5
		7	12.3	7.8	17.3	12.6	22.3	17.6	27.3	22.6	32.3	27.6	37.3	32.6	42.3	37.6	47.3	42.6	52.3	47.6	57.3	52.6	17.4	12.7
		8			15.2	9.7	20.2	14.7	25.2	19.7	30.2	24.7	35.2	29.7	40.2	34.7	45.2	39.7	49.2	44.7	54.2	49.7	20.3	14.8
		9					18.1	11.8	23.1	15.8	28.1	21.8	33.1	26.8	38.1	31.8	43.1	36.8	48.1	41.8	53.1	46.8	23.2	16.9
		10							21	13.9	26	18.9	31	23.9	38	28.9	41	28.9	51	43.9	56.1	48.1	26.1	19
	11									23.9	16	28.9	21	33.9	26	38.9	31	43.9	36.9	49.1	41.9	29	21.1	
	12										26.8	18.1	31.8	23.1	36.8	29.1	41.8	34.1	46.8	39.1	51.1	43.1	31.9	23.2
	NOG BT-83S	6	22.2	16	29.9	22.7	37.6	30.3	45.2	38	52.8	45.6	60.5	53.2	68.1	60.8	75.7	68.4	83.3	76	90.9	83.6	24.5	16.4
		7	19.0	10.4	26.7	18.1	34.3	25.7	42	33.4	48.5	41	57.2	48.6	64.8	56.2	71.7	63.1	78.7	70.1	85.6	77	27.6	19
		8			23.6	13.6	31.2	21.1	38.8	28.8	46.5	38.5	54.1	44	61.7	51.8	69.3	61.6	77.1	68.5	85.6	77	32.2	22.1
		9					28	16.5	35.7	24.2	43.3	31.8	50.9	39.4	58.5	47	66.1	54.6	72.1	63.5	80.6	72	36.8	25.3
		10							32.5	19.6	40.1	27.2	47.7	34.8	55.3	42.4	62.9	50.4	56.9	44.4	78.2	65.3	41.4	28.5
11										37	22.6	44.6	30.2	52.2	37.8	60.9	47.8	54.3	41.8	75.1	60.7	46	31.6	
12											41.4	25.6	55.2	40.8	63.9	50.8	57.3	44.8	71.9	58.1	71.3	50.6	34.8	
NOG BT-92S		6	32.8	21.7	44.1	33	55.4	44.3	66.8	55.5	77.9	66.8	89.1	78	95.6	82.4	102.2	89	120.1	102.4	117.9	104.7	34.4	23.3
		7	28.1	14.9	39.4	26.2	50.7	37.5	61.9	48.7	73.2	60	84.4	71.2	96.6	82.4	102.2	89	120.1	102.4	117.9	104.7	41.2	28
		8			34.7	19.3	46	30.8	67.2	41.8	86.5	53.1	79.7	64.3	90.9	75.5	102.2	89	120.1	102.4	117.9	104.7	48.1	32.7
		9					41.4	23.7	82.6	34.9	99.4	48.2	75.1	67.4	98.3	88.8	107.4	97.4	120.1	102.4	117.9	104.7	55	37.3
		10							47.9	28	105.5	54.5	81.6	76.9	108.1	94.9	117.9	107.4	120.1	102.4	117.9	104.7	61.9	42
	11									112.1	61	86.8	81.6	110.1	96.9	117.9	107.4	120.1	102.4	117.9	104.7	68.7	46.7	
	12										118.5	78	91.6	86.8	114.1	100.9	117.9	107.4	120.1	102.4	117.9	104.7	75.8	51.4
	NOG BT-105S	6	49.7	32.1	66	48.4	82.3	64.7	98.8	81	114.8	97.2	131.1	113.5	141	119.9	150.8	131.1	160.8	141.1	170.8	150.8	49.2	31.6
		7	43.3	22.2	59.6	38.6	76.9	54.6	92.2	71.1	108.4	87.3	124.7	103.5	141	119.9	150.8	131.1	160.8	141.1	170.8	150.8	59.1	38
		8			53.3	28.7	68.8	46	85.9	61.3	102.1	77.6	118.4	93.8	134.7	110.1	150.8	131.1	160.8	141.1	170.8	150.8	68.9	44.3
		9					83.3	35.2	79.8	51.5	95.8	67.7	112.1	84	128.4	100.3	144.8	100.3	177.2	148.1	205.4	171.7	78.7	50.6
		10							73.3	41.6	83.1	48	99.4	84.3	115.7	90.4	135.3	106.8	184.8	159	219.8	184.8	88.4	56.9
11										88.1	55	105.8	89.1	122.1	94.1	141.1	110.1	184.8	159	219.8	184.8	95.9	63	
12											93.1	64.7	109.4	91	125.6	71	158.2	119.8	190.7	152.3	208	108	69.6	
NOG BT-126S		6	74.8	47.8	100.2	73.2	126.8	96.8	151	124	176.3	149.3	201.7	174.7	216.1	185.1	231.4	199.1	271.2	230.2	311.9	264.9	79	52
		7	63.8	32.8	89.2	58.2	114.8	83.8	140	109	165.3	134.3	190.7	159.7	216.1	185.1	231.4	199.1	271.2	230.2	311.9	264.9	94	63
		8			79.2	42.2	104.8	77.8	130	98	155.3	118.3	180.7	143.7	206.1	169.1	231.4	199.1	271.2	230.2	311.9	264.9	110	73
		9					88.6	52.6	119	78	144.3	103.3	169.7	128.7	195.1	154.1	220.4	154.1	271.2	230.2	311.9	264.9	125	84
		10							109	62	134.3	87.3	159.7	112.7	185.1	138.1	210.4	138.1	281.2	242.2	300.9	248.9	141	94
	11									123.3	71.3	145.7	96.7	174.1	122.1	199.4	122.1	250.2	198.2	300.9	248.9	157	105	
	12										138.7	80.7	164.1	106.1	189.4	106.1	240.2	182.2	290.9	232.9	311.9	264.9	173	115
	NOG BT-140S	6	130.9	87.9	174.3	131.3	217.7	174.7	261	218	304.4	281.4	374.8	304.8	374.8	322.2	400.8	322.2	400.8	322.2	400.8	322.2	129	86
		7	113.9	61.9	157.3	105.3	200.7	148.7	244	182	287.4	236.4	330.8	278.8	374.8	322.2	400.8	322.2	400.8	322.2	400.8	322.2	155	103
		8			140.3	79.3	183.7	122.7	227	166	270.4	209.4	313.8	252.8	357.2	296.2	400.8	322.2	400.8	322.2	400.8	322.2	181	120
		9					186.7	87.7	210	141	253.4	184.4	288.8	227.8	340.2	271.2	383.6	271.2	470.3	401.3	536.3	589.1	206	137
		10							192	115	265.4	158.4	278.8	201.8	322.2	245.2	366.6	245.2	452.3	376.3	536.3	589.1	232	155
11										218.4	132.4	261.8	175.8	306.2										

Single Acting Actuator Output Torque(Nm)

Model	Air pressure		Spring Torque																Spring Torque				
	Spring Q.ty	2.5bar		3.0bar		3.5bar		4.0bar		4.5bar		5.0bar		5.5bar		6.0bar		7.0bar		8.0bar		0° Start	90° End
		0° Start	90° End	0° Start	90° End	0° Start	90° End	0° Start	90° End	0° Start	90° End	0° Start	90° End	0° Start	90° End	0° Start	90° End	0° Start	90° End				
NOGBT-360B	5	1810	1281	2497	1878	3003	2474	3800	3071	4198	3887	4793	4284	5165	4620							1702	1173
	6	1575	940			2172	1637	2788	2133	3366	2730	3961	3328	4558	3923							2043	1408
	7			2497	1878	3003	2474	3800	3071	4198	3887	4793	4284	5165	4620	5817	4180					2383	1642
	8			1836	1197	2299	1452	2896	2049	3492	2845	4089	3242	4589	3839	5282	3839	6475	5828			2724	1877
	9							2881	1709	3267	2308	3854	2902	4451	3499	5047	3499	8240	5288	7434	6482	3064	2112
	10									3023	1964	3620	2561	4217	3158	4813	3158	6006	4947	7200	6141	3405	2346
NOGBT-400B	7	2413	1378	3283	2220	4113	3070	4863	3920	5813	4770	6663	6020	7250	6058							2880	1837
	8	2150	958	3090	1808	3850	2858	4700	3606	5550	4358	6400	5208								3292	2100	
	9	1838	647	2738	1397	3588	2247	4438	3077	5288	3947	6138	4797	8888	5847	7838	5647				3703	2362	
	10	1628	435	2478	985	3328	1835	4178	2895	5028	3535	5976	4385	6726	5235	7576	6235	8278	7785		4115	2624	
	11			2213	574	3083	1424	3913	2274	4763	3124	5613	3974	6483	4824	7313	4824	9013	7374	10713	9074	4526	2887
	12					2801	1012	3651	1662	4601	2712	5351	3662	6201	4412	7051	4412	8751	8862	10451	8862	4938	3149
	13							3388	1461	4238	2301	6088	3161	5938	4001	6788	4001	8488	8561	10188	8281	5349	3412
	14									3978	1889	4826	2739	6876	3589	6526	3589	8226	6139	8926	7839	5761	3674
	16											4563	2328	7413	3178	6283	3178	7963	6726	8683	7428	6172	3937
	16													5151	2768	8001	2768	7701	5316	9401	7016	6584	4199

Sizing information and How to order

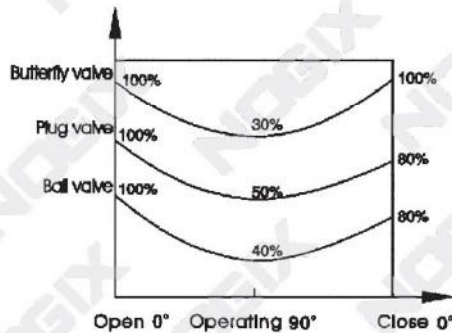

Forexample

Butterfly of the original maximum torque=80Nm

Opened torque $80 \times 30\% = 24\text{Nm}$

Air pressure=5Bar

We can choose BT-125SK10

Air travel $0^\circ = 148.7\text{N.m} > 80\text{N.m}$

Air travel $90^\circ = 96.7\text{N.m} > 24\text{N.m}$

Spring stroke $90^\circ = 157\text{N.m} > 24\text{N.m}$

Spring stroke $0^\circ = 105\text{N.m} > 80\text{N.m}$

The above figures show opening meet of the butterfly valve

Operating type (Double acting and spring return)

Air supply connection is designed in accordance with NAMUR Standard to install solenoid valves.




The Namur drive pinion and the Namur top mounting connection permit direct installation of accessories such as limit switch box and positioner.



Bottom mounting connection is designed in accordance with ISO5211, DIN3337 standards for direct mounting with valve gear boxes or mounting brackets.



Operating conditions:



1. Operating media
Dry or lubricated air, or the non-corrosive gases
The maximum particle diameter must less than $30 \mu\text{m}$
2. Air supply pressure
The minimum supply pressure is 2.5 Bar
The maximum supply pressure is 8 Bar
3. Operating temperature
Standards: $-20^\circ\text{C} \sim +80^\circ\text{C}$
Low temperature: $-40^\circ\text{C} \sim +80^\circ\text{C}$
High temperature: $-15^\circ\text{C} \sim +150^\circ\text{C}$
4. Travel adjustment
Have adjustment range of $\pm 5^\circ$ for the rotation at 0° and 90°
5. Application
Either indoor or outdoor

Air Consumption

Model	Maximum pressure	The angle of rotation	Temperature	1 st the need to adjust the number of flaps	Diameter	Internal volume		On-off time		Weight	
						close	Open	close	Open	A weight	Spring weight
NOG BT - 52S	Lubrication or dry of compressed air 8bar	(0°-90°) ± 5° or full itinerary 0°-90°	B (normal) NBR O-ring -20→80°C G (High Temperature) Viton O-ring -15→150°C D (Low Temperature) Silicone O-ring -40→80°C	1/6	52	0.1	0.2	DA 0.6	DA 0.6	DA 1.30	...
NOG BT - 63S								SR 2.0	SR 0.5	SR 1.42	0.0095
NOG BT - 75S								DA 0.7	DA 0.7	DA 2.05	...
NOG BT - 83S								SR 2.0	SR 1.0	SR 2.25	0.0135
NOG BT - 92S								DA 0.8	DA 0.7	DA 2.65	...
NOG BT - 105S								SR 2.0	SR 1.0	SR 2.95	0.0210
NOG BT - 125S								DA 0.9	DA 0.8	DA 3.30	...
NOG BT - 140S								SR 2.5	SR 1.0	SR 3.70	0.0365
NOG BT - 160S								DA 1.0	DA 1.0	DA 4.55	...
NOG BT - 190S								SR 3.0	SR 1.0	SR 5.30	0.0600
NOG BT - 210S								DA 1.5	DA 1.5	DA 5.80	...
NOG BT - 240S								SR 3.0	SR 1.0	SR 6.70	0.0730
NOG BT - 270S								DA 2.0	DA 2.0	DA 8.95	...
NOG BT - 300S								SR 4.0	SR 1.0	SR 10.35	0.1100
NOG BT - 350S								DA 2.5	DA 2.5	DA 13.35	...
NOG BT - 400S								SR 4.0	SR 1.0	SR 15.35	0.1865
NOG BT - 52S								DA 4.0	DA 3.0	DA 19.20	...
NOG BT - 63S	SR 4.0	SR 1.5	SR 23.10	0.2695							
NOG BT - 75S	DA 5.0	DA 4.0	DA 31.05	...							
NOG BT - 83S	SR 5.0	SR 3.0	SR 36.80	0.4792							
NOG BT - 92S	DA 5.0	DA 5.0	DA 39.00	...							
NOG BT - 105S	SR 6.0	SR 3.0	SR 45.50	0.5001							
NOG BT - 125S	DA 6.0	DA 6.0	DA 53.00	...							
NOG BT - 140S	SR 12	SR 4.0	SR 64.00	0.9167							
NOG BT - 160S	DA 8.0	DA 8.0	DA 76.00	...							
NOG BT - 190S	SR 15	SR 6.0	SR 95.20	1.6000							
NOG BT - 210S	DA 12	DA 12	DA 100.0	...							
NOG BT - 240S	SR 18	SR 8.0	SR 128.2	2.3500							
NOG BT - 270S	DA 14	DA 14	DA 186.0	...							
NOG BT - 300S	SR 20	SR 10	SR 216.0	2.5001							
NOG BT - 350S	DA 15	DA 15	DA 243.0	...							
NOG BT - 400S	SR 25	SR 12	SR 279.0	3.0001							

Air consumption rest with Supply. Air volume and Action cycle times, expressions

$$L/Min = \text{Air volume} (\text{Air volume Opening} + \text{Air volume closing}) \times [(\text{Air Supply (Kpa)} + 101.3) \div 101.3] \times \text{Action cycle times (min)}$$

Common faults and inspection, troubleshooting

Failure phenomenon	Inspection Items	Solution
Pneumatic valve can not move	1, the electromagnetic valve is normal, coil is burned, Electromagnetic valve is stuck being stolen	Solenoid valve replacement, replacement coils, remove stolen property.
	2, a separate air supply pneumatic actuator test, check seals and whether the cylinder is damaged.	Replace a bad ring and cylinder.
	3, there are impurities in the spool valve stuck.	Remove impurities, replace damaged parts.
	4, the handle in a manual motor location.	change the handle to pneumatic position
Slow motion, crawling	1, supply pressure is not enough.	The increase of gas supply pressure (0.4-0.7Mpa)
	2, pneumatic actuator output torque is too small.	Increase the pneumatic actuator Production.
	3, the valve spool or valve assembly too tight.	Re-assembly adjustments.
	4, air supply pipe plug, flow is too small.	Exclude plug, replace the filter cartridge.
Reply devices without signal	1, power line short circuit or open circuit.	Maintenance of power lines.
	2, reply within the cam position is not accurate.	Adjust the cam to the correct location
	3, micro switch damaged.	Replacement Micro Switch



Add

Tel

Fax

E-Mail

