

CG-900HD ATEX

2.2 kW · 230 or 230/400 V


DIESEL

PETROL

- Self-priming electric pump monobloc execution with multi-blades open impeller, suitable for pumping diesel, petrol and other compatible products, manufactured in accordance with standards ATEX 94/9/ CE (II 2G Ex d IIC T4).
- A suitable non-return valve is placed inside the pump body to avoid the empty after stopping.

FEATURES

- Max. suction depth: 6 m
- Max. liquid temperature: +50 °C
- Max. solid diameter: 27 mm
- Max. delivery: 54 m³/h · 900 l/min
- Max. manometric head: 1.6 bar
- Øinlet/outlet: F3"

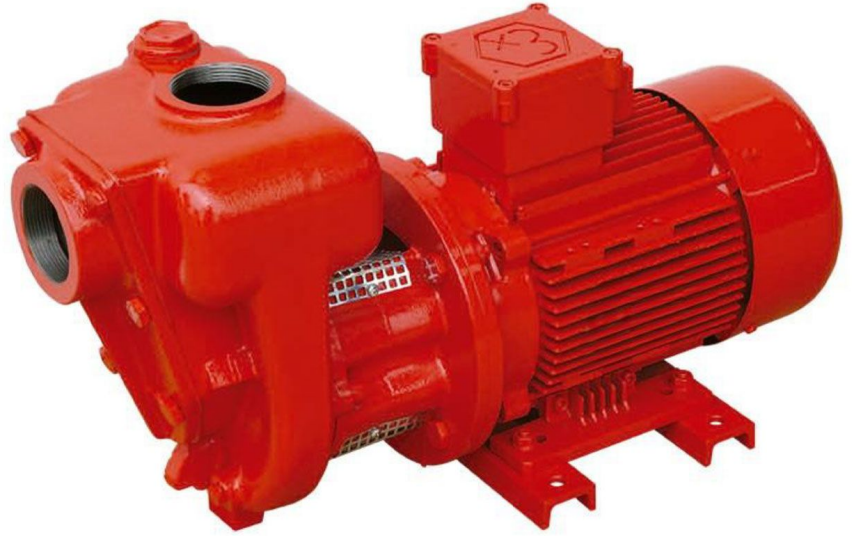

Material:

- Pump body: Cast iron
- Valve body: Cast iron
- Support: Cast iron
- Impeller: Cast iron
- Motor shaft: Stainless Steel AISI 316
- Seal: Viton/Carbon/Alumina

Size and weight (approx.):

- Dim.: 260x600x345 mm (length x width x height)
- Weight: 37.2 kg

CG-900HD ATEX 230 V · 900 l/min

10200-CF00000

- Motor: 2.2 kW 230 VAC 50 Hz
- Consumption: 13.1 A
- 2,800 rpm
- IP-55 protection

CG-900HD ATEX 230/400 V · 900 l/min

10201-CF00000

- Motor: 2.2 kW 230/400 VAC 50 Hz
- Consumption: 8.3-4.8 A
- 2,800 rpm
- IP-55 protection